


DUALINE CONTROL




CRG 30



Recess
mounted



Indoor/
outdoor

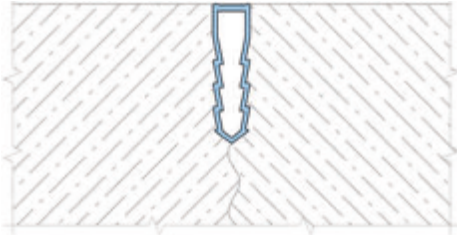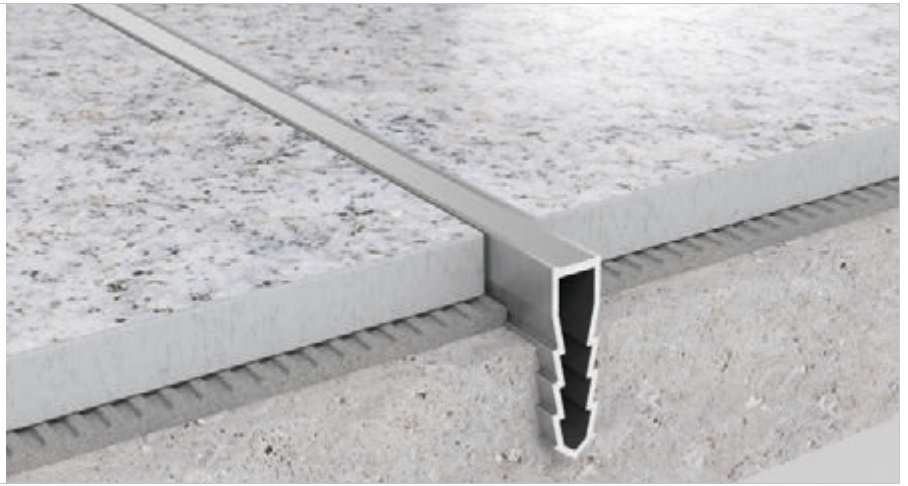

DESIGNATIONS:

A – visible width;
B – profile height;

M_x – horizontal movements;

Profile	A, mm	H, mm	M_x , mm
CRG 30/15/8	8	15	–
CRG 30/30/8	8	30	–

▶ TECHNICAL DATA

→ PROFILE

Material	Aluminum EN AW 6063 T6 (T66 ¹)
Strength, MPa	$\sigma_b = 205$ (255 ¹)
Tolerances	EN 12020-2:2008
Tooling	Mounting holes
Fasteners	Not required
Surface coat	Mill finish ²
Length, m	3,0

¹ For EU market.

² The profile can be optionally anodized (ask for details).