


DUALINE CONTROL

CRG 35



Recess mounted



Indoor/
outdoor





CRG-SS 35



CRG-AL 35



CRG-BR 35

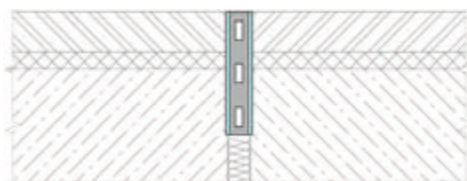

| Profile | A ¹ , mm | B ² , mm | H ³ , mm | M _x , mm |
|--------------|---------------------|---------------------|---------------------|---------------------|
| CRG 35/9/10 | 7 | 9 | 10 | 2(+/-1) |
| CRG 35/9/20 | 7 | 9 | 13 | 2(+/-1) |
| CRG 35/9/30 | 7 | 9 | 15 | 2(+/-1) |
| CRG 35/9/40 | 7 | 9 | 18 | 2(+/-1) |
| CRG 35/9/50 | 7 | 9 | 20 | 2(+/-1) |
| CRG 35/9/60 | 7 | 9 | 22 | 2(+/-1) |
| CRG 35/9/70 | 7 | 9 | 25 | 2(+/-1) |
| CRG 35/9/80 | 7 | 9 | 30 | 2(+/-1) |
| CRG 35/9/90 | 7 | 9 | 35 | 2(+/-1) |
| CRG 35/9/100 | 7 | 9 | 40 | 4 (+2/-2) |

¹The standard thickness of the gasket insert is specified.

The following thicknesses are also available: - 4, 8, 12 mm.

² Visible width with 1 mm thickness of the guide brackets is indicated.

The following thick-nesses are available: - 1.5, 2 mm.

³The profile can be manufactured to any required height.

► LABELING

Color of insert

Profile height

Visible width

CRG-AL 35 / 7 – 9 / 20 / LINEN

Thickness of gasket insert

Profile Series:

CRG-AL 35 – aluminium version;

CRG-SS304/316 35 – stainless steel version (with the steel grade);

CRG-BR 35 – brass version.

► TECHNICAL DATA

| | | | | | |
|--------------------------------------|--|----------------------|-------------------------------|----------------|-------------|
| Material of guide¹ | AISI 304 (1.4301) | AISI 316 (1.4401) | Aluminum (6063 or 5754) | Brass | |
| Designation | CRG-SS304 | CRG-SS316 | CRG-AL | CRG-BR | |
| Strength, MPa | $\sigma_b=515$ | $\sigma_b=505$ | $\sigma_b=265$ | $\sigma_b=330$ | |
| Tooling | Mounting holes | | | | |
| Standard length | 2.44 – standard (2.50 or 3.00 meters—on request) | | | | |
| Material of insert | Neoprene | | | | |
| Strength, N/mm | $\sigma_b=10$ | | | | |
| Shore A | 55 | | | | |
| Elongation to break | >600 | | | | |
| Resistance | acid,chemical and UV: excellent | | | | |
| Color of insert | charcoal | pewter | light grey | earth | light smoke |
| | sandstone | alabaster | light beige | linen | milky white |

► EXTRAS

Additionally, the profile can be supplied with special anchors for installation.

